

Flotrex* GF

pleated filters with glass microfiber media



www.pckemsolution.com

Tel. +66 2 587 2834

Line: @pckem_solution

Mail: sales@pckemsolution.com



Figure 1: Flotrex GF Filters

description and use

The Flotrex* GF (FGF) filter (Figure 1) is an absolute-rated, glass microfiber filter. The filters do not leach any flavor-altering substances and are ideal for final filtration applications. FGF filters have the important International Bottled Water Association (IBWA)-recommended 1.0-micron absolute rating.

The FGF filter is just one example of our strong commitment to liquid, air and gas treatment. Our complete portfolio includes filters for every stage of processing, and we offer custom solutions for your unique applications. SUEZ is your complete source for filters, housings, and other filtration equipment.

applications

Flotrex GF filters are specifically designed for high throughput and long service life. Typical applications include:

- Final Filtration for Bottled Water
- Prefiltration of Pharmaceuticals and Biologicals
- Cosmetic Oil, Gel and Shampoo Filtration
- Beverage Clarification
- Paints and Coatings
- Ink

general properties

Flotrex GF filters are available the following absolute pore size micron ratings: 0.45 and 3.0 μm and 1.0 μm . Tables 1, 2, 3, and 4 show further details on materials of construction, dimensions, operational limits, and flow performance in air and water.

Table 1: Materials of Construction

Description	Material of Construction
Filtration Media	Acrylic Resin-Bonded Glass Microfiber
Support Layers	Polypropylene Microfiber
Core and Cage	Polypropylene
Endcaps and Adapters	Polypropylene

Table 2: Dimensions

Filter Model	Nominal O.D.	Nominal I.D.	Effective Filtration Area
FGF94	2.75" (70 mm)	1.25" (31mm)	3.8 ft ² (0.35m ²)
FGF01	2.75" (70 mm)	1.25" (31mm)	4.4 ft ² (0.41m ²)
FGF03	2.75" (70 mm)	1.25" (31mm)	4.4 ft ² (0.41m ²)

Find a contact near you by visiting www.suezwatertechnologies.com and clicking on "Contact Us."

*Trademark of SUEZ; may be registered in one or more countries.

©2017 SUEZ. All rights reserved.

Table 3: Operational Limits


Description	Operational Limits
Maximum Forward Differential Pressure	60 psi (4.1 bar) at 70°F (21°C)
Maximum Reverse Differential Pressure	30 psi (2.1 bar) at 70°F (21°C)
Maximum Operating Temperature	180°F (82°C) at 10 psid (0.69 bar) in water

additional information

- Flotrex GF filters may be autoclaved or in situ steam sterilized (up to 257°F [125°C] 30-minute cycles) for a maximum accumulated exposure of 10 hours. Alternatively, the filters may be sanitized with compatible chemical agents.
- SUEZ certifies that the materials contained in its Flotrex GF pleated filters meet US FDA requirements for food contact under the applicable regulations in 21 CFR. For further information, contact SUEZ technical services. Flotrex GF filters meet the test criteria for USP Class VI-121°C Plastics.

- Aqueous extracts from Flotrex GF filters contain less than 0.25 EU/ml. The filters typically exhibit low levels of non-volatile residues.
- SUEZ Filter cartridges are designed and manufactured for resistance to a wide range of chemical solutions. Conditions will vary with each application and users should carefully verify chemical compatibility. Please contact your SUEZ distributor for more information.

Table 4: Flow Performance in Clean Water¹

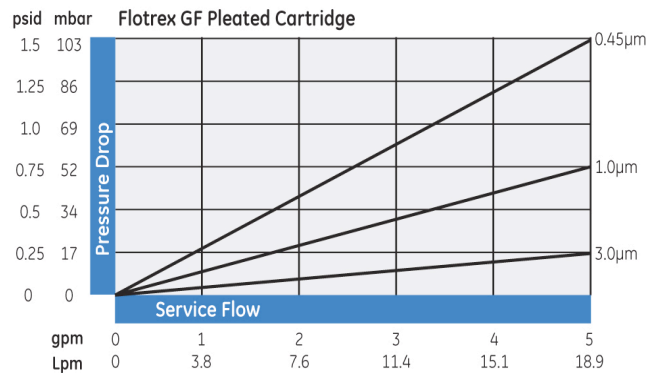

¹Data based on 10" length filter

Table 5: Ordering Information

Type	Absolute Micron Rating	Nominal Cartridge Length	End #1 Adapter	End #2 Adapter	Elastomer Material
FGF	94 = 0.45 µm	1 = 10 inch (25 cm) 2 = 20 inch (51 cm) 3 = 30 inch (76 cm) 4 = 40 inch (102 cm)	A = Open End Gasket B = 120 O-Ring C = 213 O-Ring E = 222 O-Ring F = 226 O-Ring J = 020 O-Ring Q = 222 O-Ring Stainless Steel Insert ² Z = 226 O-Ring Stainless Steel Insert ²	A = Open End Gasket B = 120 O-Ring C = 213 O-Ring G = Closed End Cap H = Fin Adapter	B = Buna-N E = EPDM S = Silicone T = Teflon ³ Encapsulated Viton ³ (only in 222 and 226 sizes) V = Viton
	01 = 1.0 µm				
	03 = 3.0 µm				
Example: FGF013EHS					

²Q or Z Adapters normally require G or H adapters.

³Teflon and Viton are registered trademarks of DuPont.

